


**Smaller, lighter and
even more powerful**

PREBENA®

www.prebena.com

Pneumatic Stapler 4C-L50 for staples type L from 19 - 50 mm (3/4" - 2")

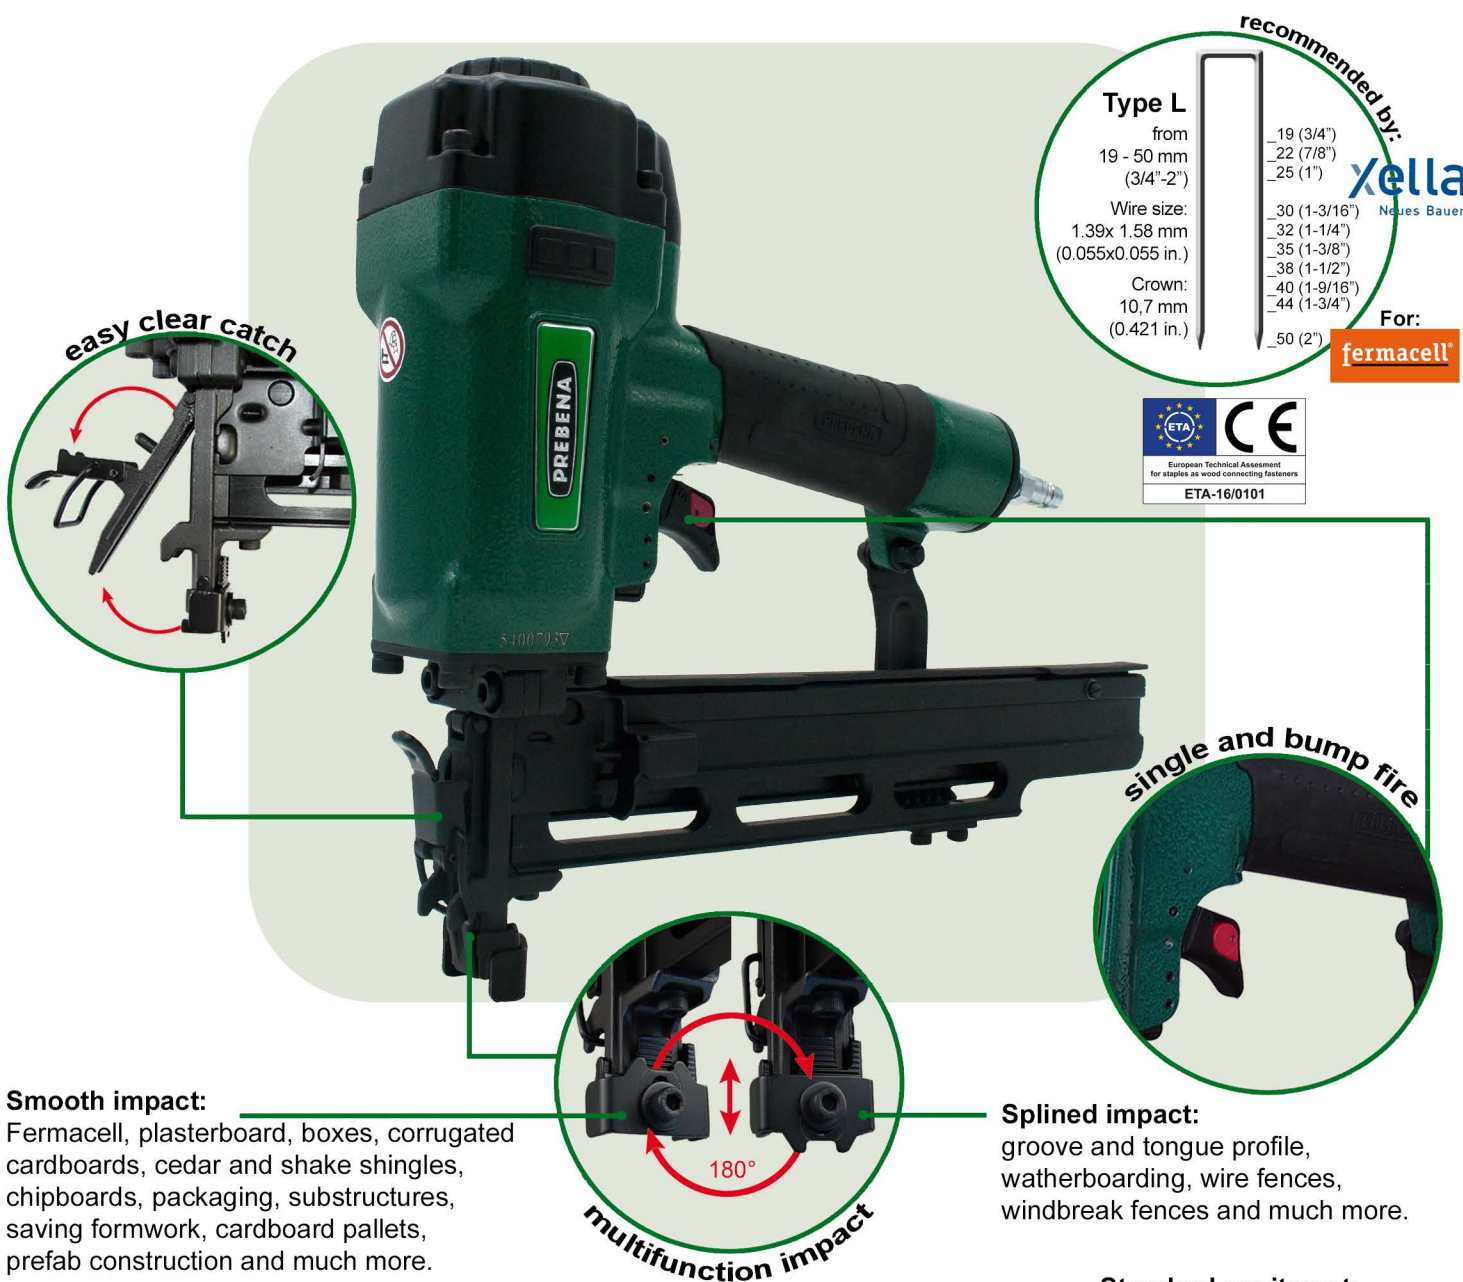

recommended by:

Type L	
from	19 (3/4")
19 - 50 mm	22 (7/8")
(3/4" - 2")	25 (1")
Wire size:	
1.39x 1.58 mm	30 (1-3/16")
(0.055x0.055 in.)	32 (1-1/4")
	35 (1-3/8")
	38 (1-1/2")
Crown:	
10,7 mm	40 (1-9/16")
(0.421 in.)	44 (1-3/4")
	50 (2")

For: **fermacell**

xella
Neues Bauen



Smooth impact:

Fermacell, plasterboard, boxes, corrugated cardboards, cedar and shake shingles, chipboards, packaging, substructures, saving formwork, cardboard pallets, prefab construction and much more.

Technical details:

Weight: 2,2 kg (4.85 lb.)

Operating pressure:

approx. 5 - 8 bar (71 - 114 psi.)

Air requirement:

approx. 1,72 l / staple (0.378 gal./ staple)

- 180° rotatable for work with smooth ore splined impact
- adjustable depth control
- available with and without impact

Splined impact:

groove and tongue profile, watherboarding, wire fences, windbreak fences and much more.

Standard equipment:

- increased driver
- adjustable exhaust
- ergonomic handle
- safety device

PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20 - 26 · 63679 Schotten - Germany

Phone: +49 (0) 6044/9601 - 0 · Fax: +49 (0) 6044/9601-820 · info@prebena.com