


**Smaller, lighter and
even more powerful**



www.prebena.com


Pneumatic Stapler 4C-Z50

for staples type Z from 16 - 50 mm (5/8" - 2")

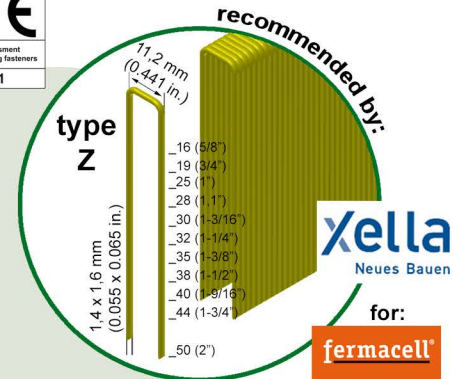

Technical details:
 Weight: 2,2 kg (4.85 lb.)
 Operating pressure:
 approx. 5 - 8 bar (71 - 114 psi.)
 Air requirement:
 approx. 1,72 l / staple
 (0.378 gal./ staple)

Smooth impact:
 Fermacell, plasterboard, boxes, corrugated
 cardboards, cedar and shake shingles,
 chipboards, packaging, substructures,
 saving formwork, cardboard pallets,
 prefab construction and much more.

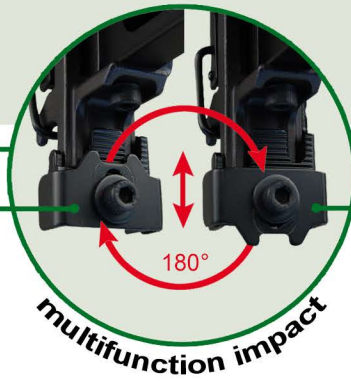

Splined impact:
 groove and tongue profile,
 watherboarding, wire fences,
 windbreak fences and much more.



- 180° rotatable for work with smooth ore splined impact
- adjustable depth control
- available with and without impact

- Standard equipment:**
- increased driver
 - adjustable exhaust
 - ergonomic handle
 - safety device