


INSULATING SECURED FASTENING

PREBENA

www.prebena.de

Pneumatic Stapler 9X-WP160 for staples type WP from 75-160 mm (3" - 6-1/4")

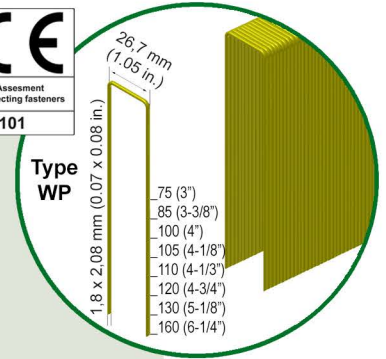

Lock-out safety device



No mar tip

Recommended by:



IN THERMO
Systemlösungen für den Hausbau



STEICO
natürlich besser dämmen

Technical details

Weight: 6,3 kg (13.86 lb.)
Operating pressure: 5 - 8 bar (72-116 psi.)
Air requirement:
approx. 2,9 l (0.64 gal.) / staple
LxBxH: 400 x 138 x 470 mm
(15.75 x 5.43 x 18.5 in.)

Applications:

Insulation panels, insulation panels from Cellulose, wood wool slabs, multi-layer plates, soft fiber insulating, rock wool insulation panels, etc.

Standard equipment:

- Single shot trigger with safety device
- Depth adjustment
- Exhaust silencer
- Strong magazine
- No mar tip
- Lock-out safety device
- High power
- In a metal case

quick and easy loading of the top load magazine, balanced weight distribution and ergonomic design for fatigue-poor work, the short magazine enables working in inaccessible places, like corners or slanting roof

PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20 - 26 • D-63679 Schotten

Phone: 0049 6044/9601-0 • Fax: 0049 6044/9601-820 • info@prebena.com