

COMPRESSED AIR FROM THE AIR CYLINDER

PREBENA®

www.prebena.com

Cordless Air Nailer PKT-2-J50SD-S

Brads type J from 16 - 50 mm (5/8" - 2")



Flexible use either
with compressor
or air cylinder



Depth adjustment

Technical details:

Weight: 2,1 kg (4.63 lb.)

LxWxH: 365 x 71 x 272 mm

(14.37 x 2,8 x 10,7 in.)

Operating pressure: approx. 3,5 - 10 bar
(50 - 145 psi.)

Applications:


Decorative mouldings, glazing beads,
flooring beads, hardwood trim,
joinery and furniture manufacturing, etc.

In plastic case:

- 1 PKT-2-J50SD
- 1 Refillable air cylinder KT-1000
- 1 Adapter for use with compressor



Gauge for air level

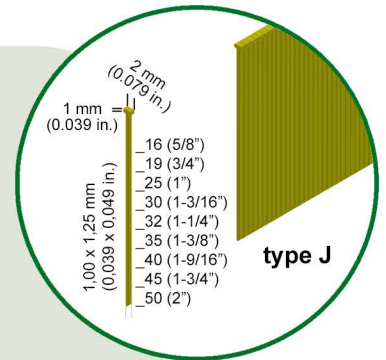

type J

2 mm
(0.079 in.)
1 mm
(0.039 in.)
1,00 x 1,25 mm
(0.039 x 0.049 in.)
16 (5/8")
19 (3/4")
25 (1")
30 (1-3/16")
32 (1-1/4")
35 (1-3/8")
40 (1-9/16")
45 (1-3/4")
50 (2")



Adjustable
working pressure



- High shot capacity and shot speed
- Ergonomic design
- Depth adjustment
- No mar tip
- Lock-out safety device
- Single or bumb fire
- Adjustable working pressure
- Gauge for working pressure
- Gauge for air level

Own refilling of air cylinder KT-1000
with filling station PKT-TWINTEC 400
or easy change at your dealer.

PREBENA Wilfried Bornemann GmbH & Co. KG

Seestraße 20 - 26 • D-63679 Schotten

Phone: 0049 6044/9601-0 • Fax: 0049 6044/9601-820 • info@prebena.com