

UNIVERSAL CORDLESS DRYWALL-SCREWDRIVER




PREBENA®

BATTERY DRYWALL SCREWDRIVER

6A-MGS55

for collated screws type MGS from 25 - 55 mm

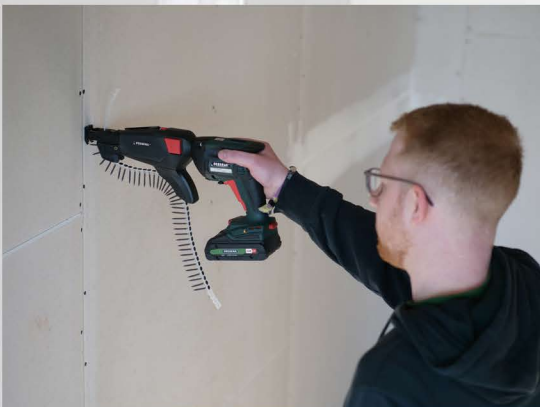

With or without collated screwdriver magazine.

Technical details:









Bit retainer: Hexagon recess 1/4" (6.35 mm)

Max. torque soft: 6 Nm

No-load speed: 0 - 5000 /min



- The expert among the cordless drywall screwdrivers with high speed for fast screwdriving in series of gypsum plasterboard
- Autostart: Screwdriver starts automatically when pressed against a surface for comfortable, economical working
- Brushless motor for quick work progress and highest efficiency, ideal for screwdriving in series
- Compact and light design for comfortable one-hand operation
- Selectable "Impuls" mode for precise driving in of protruding screws without having to remove the depth guide
- Precise driving of screws by virtue of finely adjustable depth guide and low-noise claw clutch
- With screwdriver magazine for fast, precise screwdriving in series, can be removed without any tools
- Fast adjustment of the screw length with only one push of a button
- Handy belt hook, can be fixed either on the right or left side
- Suitable for all standard collated screws

MGS-GGPH	MGS-GFPH	MGS-GBPH	MGS-FMPH
 <p>coarse thread</p>	 <p>fine thread</p>	 <p>drill point</p>	 <p>hilo thread</p>
<p>Application Wood/Plasterboard</p> 	<p>Application Metal/Plasterboard</p> <p>Max. 0,75 mm (0,03 in.)</p> 	<p>Application Metal/Plasterboard</p> <p>Max. 2,25 mm (0,09 in.)</p> 	<p>Application Metal/Fiber-board and Wood/Fiber-board</p> <p>Max. 0,75 mm (0,03 in.)</p> 

Scope of delivery 6A-MGS55-SET2:

- Akku-Auto feed screwdriver 6A-MGS55
- AKKU18-2,0-LiPower
- AKKU-STATION 12-36
- in metaBOX

One battery, many solutions. Cross-brand. 100% Compatibility



100 % compatibility for over 300 machines in the 18 V class

- limitless compatibility - everything is compatible: machines, batteries and chargers of all CAS brands
- double flexibility - work cordlessly and use machines from different manufacturers
- cost advantages through multiple use of available batteries



AKKU18-2,0-Li-Power

- intelligente Li-Power battery management
- durable battery packs with three years warranty
- capacity indicator for permanent control of the filling level



AKKU18-4,0-LiHD | AKKU18-5,5-LiHD

- LiHD batteries for ultimate performance and long service life with minimum temperature development
- durable battery packs with three years warranty
- capacity indicator for permanent control of the filling level



AKKU-STATION 12-36

- battery station for charging LiHD sliding seat batteries
- cooling during charging for significantly reduced charging times
- very low stand-by power consumption

Main voltage: 230-240 V | Mains frequency: 50-60 Hz | max. charging voltage: 3/4A



AKKU-SET 4,0 LiHD

- 2 x AKKU18-4,0-LiHD
- 1 x AKKU-STATION 12-36



AKKU-SET 5,5 LiHD

- 2 x AKKU18-5,5-LiHD
- 1 x AKKU-STATION 12-36