



## CORDLESS NAILER


PKT-8-RHC40

for nails type RHC from 15 - 40 mm




BEST QUALITY

MADE IN GERMANY

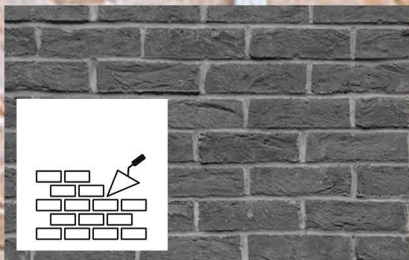

Type RHC  
from 15 - 40 mm

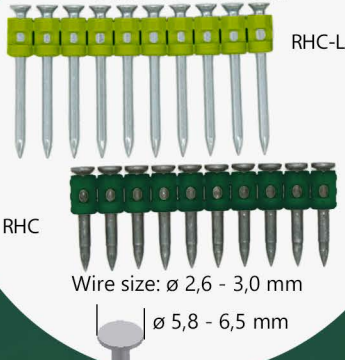

Type RHC = for heavy duty applications  
(with ballistic point)  
Type RHC-L = for easy applications

### PREBENA PKT-Technology

in combination with 18 V LiHD high-performance battery

- Independent of gas cylinder, power cord and air hose for maximum of operation
- Environment conscious – no gas, no CO<sub>2</sub>-emissions
- For indoor and outdoor use
- Weather and temperature independent
- Gauge for air level
- Pressure relief
- Fast shot sequence
- Compact design
- Operation via touch display
- Lock-out safety device
- depth adjustment
- Singel shot
- L437 x W118 x H434 mm
- In metal-case  
incl. 1 air cylinder KT-1000 - only for filling
- Also available as a set Set in metal-case  
incl. 2 AKKU18-2,0-LI-POWER, 1 AKKU-STATION 12-36,  
1 air cylinder KT-1000 - only for filling

**One battery, many solutions. Cross-brand. 100% Compatibility**



**100 % compatibility for over 300 machines in the 18 V class**

- limitless compatibility - everything is compatible: machines, batteries and chargers of all CAS brands
- double flexibility - work cordlessly and use machines from different manufacturers
- cost advantages through multiple use of available batteries



**AKKU18-2,0-Li-Power**

- intelligent Li-Power battery management
- durable battery packs with three years warranty
- capacity indicator for permanent control of the filling level



**AKKU18-4,0-LiHD | AKKU18-5,5-LiHD**

- LiHD batteries for ultimate performance and long service life with minimum temperature development
- durable battery packs with three years warranty
- capacity indicator for permanent control of the filling level



**AKKU-STATION 12-36**

- battery station for charging LiHD sliding seat batteries
- cooling during charging for significantly reduced charging times
- very low stand-by power consumption

Main voltage: 230-240 V | Mains frequency: 50-60 Hz | max. charging voltage: 3/4A



**AKKU-SET 4,0 LiHD**

- 2 x AKKU18-4,0-LiHD
- 1 x AKKU-STATION 12-36



**AKKU-SET 5,5 LiHD**

- 2 x AKKU18-5,5-LiHD
- 1 x AKKU-STATION 12-36